



# SKM-03

## Signaline Linear Heat Detector Controller



Compatible with Signaline HD/HD-R/HD-S  
Each controller monitors up to 300m  
Automatic reset  
Approved to EN54-5

Fire  
detection



Signaline






<b>Model</b>	Signaline SKM-03
<b>Supply voltage</b>	24Vdc
<b>IP rating</b>	IP65
<b>Idle current</b>	28mA
<b>Alarm current</b>	58mA
<b>Operating temp.</b>	-25°C to +50°C
<b>Mounting</b>	Wall
<b>LED indication</b>	Healthy: Green Fire: Red Fault: No LED
<b>Dimensions</b>	110 x 110 x 65mm
<b>Weight</b>	270g
<b>Material</b>	Polystyrol enclosure
<b>Colour</b>	Grey (RAL 9002)
<b>Approvals</b>	VDS, EN54-5 (G203076)

The Signaline SKM-03 controller monitors up to 300m of Signaline HD. It constantly measures for open and short circuit faults in the detector.




This system is ideal for cable ducts, road tunnels, escalators, car parks, lift shafts, conveyer belts and similar difficult to monitor environments.

**All Signaline HD Linear Heat Detectors must be fitted with a Signaline SKM Controller.**

### Conventional Systems

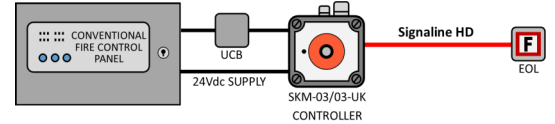

### Addressable Systems

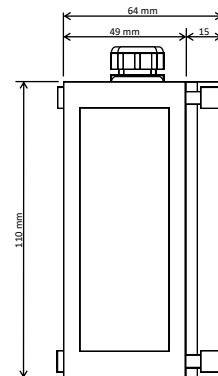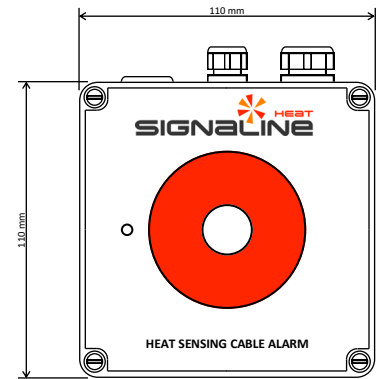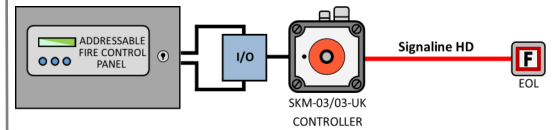

Visit [Signaline.com](http://Signaline.com) for our full range of heat detection solutions